

Presence detector - Professional Line

IR Quattro SLIM XS

V2 KNX - square

EAN 4007841 033033



infrared sensor
360°



max. 4 x 4 m
presence



IP20



KNX



10 - 1000 lux



ideal 2,5 - 4 m

TEACH

Teach mode

iQ

iQ-mode

5 JAHRE
HERSTELLER
GARANTIE

manufacturer's
warranty
steinel-professional.de/garantie



CE

Function description

Noticeably Inconspicuous. IR Quattro SLIM XS KNX, the extra-slim presence detector in concealed-box format. Fits into any standard concealed box. Overall height of just 6 mm. High-precision 360° infrared sensor with globally unique retina lens and 16 sq.m square presence detection zone (4 x 4 m). Adjustment via remote control or Smart Remote.

IR Quattro SLIM XS

V2 KNX - square

EAN 4007841 033033



Technical specifications

Type	Presence detector
Dimensions (L x W x H)	60 x 77 x 77 mm
Power supply, detail	KNX bus
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors
Installation site	ceiling
Installation	Concealed wiring
Electronic scalability	No
Mechanical scalability	No
Mounting height	2,50 – 4,00 m
Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	160 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Reach, detail	Retina lens and hexagonal Fresnel structure
Reach, radial	4 x 4 m (16 m ²)
Reach, tangential	4 x 4 m (16 m ²)
Reach, presence	4 x 4 m (16 m ²)
Twilight setting TEACH	Yes

Twilight setting	10 – 1000 lx
Time setting	60 s – 60 Min.
Basic light level function	Yes
Basic light level function in per cent	10 – 50 %
Basic light level function time	Permanently ON, 1-255 min, all night
Basic light level function percentage, from	10 %
Basic light level function percentage, up to	50 %
KNX functions	Light output 4x, Presence output, Light level, Constant-lighting control, Basic light level function, HVAC output
With bus coupling	Yes
Settings via	ETS software, Remote control, Bus, Smart Remote
Interconnection	Yes
Type of interconnection	Master/slave, Master/master
IP-rating	IP20
Material	Plastic
Ambient temperature	0 – 40 °C
Colour	white
Colour, RAL	9010
Manufacturer's Warranty	5 years
Version	KNX - square
PU1, EAN	4007841033033

Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX

Presence detector - Professional Line


IR Quattro SLIM XS

V2 KNX - square

EAN 4007841 033033



Detection Zone

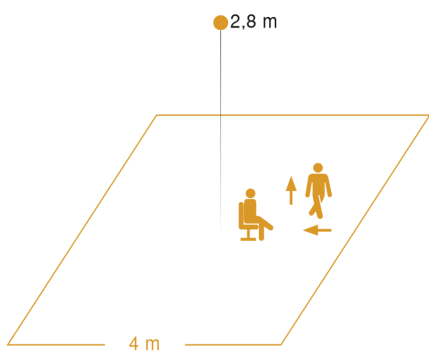

Mögliche Montagehöhe: 2,50 m – 4,00 m
Orange: Präsenz, tangential und radial

Dimension Drawing

